

## CVG 2116 – Fluid Mechanics

### Assignment 4 - Solution

1. Bernoulli's Equation between section 1 and 2:

$$\frac{P_1}{\gamma} + z_1 + \frac{v_1^2}{2g} = \frac{P_2}{\gamma} + z_2 + \frac{v_2^2}{2g}$$

Datum: at section 1.

assume section 1 and 2 distance is D:  $z_1 = 0, z_2 = D$

$$\frac{P_1}{\gamma} - \frac{P_2}{\gamma} - D = \frac{v_2^2}{2g} - \frac{v_1^2}{2g}$$

$$A_1 V_1 = A_2 V_2$$

$$\frac{P_1}{\gamma} - \frac{P_2}{\gamma} - D = \frac{v_1^2}{2g} \left[ \left( \frac{A_1}{A_2} \right)^2 - 1 \right]$$

Manometer:

$$P_1 + \gamma \Delta h - \gamma_m \Delta h - \gamma D = P_2$$

$$\frac{P_1}{\gamma} - \frac{P_2}{\gamma} - D = \Delta h \left( \frac{\gamma_m}{\gamma} - 1 \right)$$

Manometer and Bernoulli's:

$$\Delta h \left( \frac{\gamma_m}{\gamma} - 1 \right) = \frac{v_1^2}{2g} \left[ \left( \frac{A_1}{A_2} \right)^2 - 1 \right]$$

$$(0.049) \left( \frac{18850.5}{1.032 * 9.81} - 1 \right) = \frac{v_1^2}{2 * 9.81} [(2)^2 - 1]$$

$$v_1 = 24.42 \frac{m}{s}$$

2. Bernoulli's Equation between section 1 and 2:

$$\frac{P_1}{\gamma} + z_1 + \frac{v_1^2}{2g} = \frac{P_2}{\gamma} + z_2 + \frac{v_2^2}{2g}$$

$$A_1 V_1 = A_2 V_2$$

$$V_1 \left( \frac{D_1}{D_2} \right)^2 = V_2$$

Datum at z1:  $z_1 = 0$


$$z_2 = 2 * \sin \theta$$

$$\frac{v_1^2}{2g} \left( 1 - \left( \frac{D_1}{D_2} \right)^2 \right) = -\frac{P_1}{\gamma} + \frac{P_2}{\gamma} + 2 * \sin \theta$$

$$v_1 = \sqrt{\frac{2g}{\left( 1 - \left( \frac{D_1}{D_2} \right)^2 \right)} \left[ -\frac{P_1}{\gamma} + \frac{P_2}{\gamma} + 2 * \sin \theta \right]}$$

$$v_1 = \sqrt{\frac{2 * 9.81}{\left( 1 - \left( \frac{40}{50} \right)^2 \right)} \left[ -\frac{526700}{9810} + \frac{800000}{9810} + 2 * \sin 5 \right]} = 30.5 \text{ m/s}$$

3. Set the control volume.

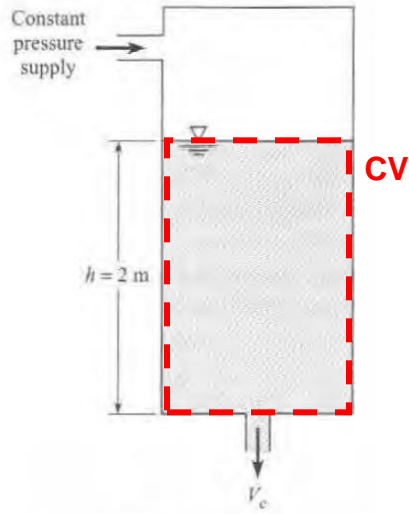

Continuity equation:

$$0 = \frac{d}{dt} m_{cv} + \sum \dot{m}_o - \sum \dot{m}_i$$

**Term by Term analysis**

Term1: is mass inside the CV change through the time? YES!

$$m_{cv} = \rho V$$

$$m_{cv} = \rho(hA_{tank})$$

$$\frac{d}{dt} m_{cv} = \frac{d}{dt} (\rho h A_{tank})$$

$$\frac{d}{dt} m_{cv} = \rho A_{tank} \frac{d}{dt} h$$

Term2: There is one outlet.

$$\dot{m}_o = \rho Q$$

$$\dot{m}_o = \rho V A_{exit}$$

$$\dot{m}_o = \rho A_{exit} \sqrt{\frac{2P}{\rho} + 2gh}$$

Term3: There is no inlet.

Rewrite the continuity equation:

$$\rho A_{\text{tank}} \frac{dh}{dt} = -\rho A_{\text{exit}} \sqrt{\frac{2P}{\rho} + 2gh}$$

$$\frac{A_{\text{tank}}}{A_{\text{exit}}} \frac{dh}{\sqrt{\frac{2P}{\rho} + 2gh}} = -dt$$

$$\frac{A_{\text{tank}}}{A_{\text{exit}}} \int_{h_0}^0 \frac{dh}{\sqrt{\frac{2P}{\rho} + 2gh}} = - \int_0^{t_{\text{empty}}} dt$$

$$-\frac{A}{A_e g} \left( \frac{2p}{\rho} + 2gh \right)^{1/2} \Big|_{h_0}^0 = \Delta t$$

$$\Delta t = \frac{A}{A_e g} \left[ \left( \frac{2p}{\rho} + 2gh_0 \right)^{1/2} - \left( \frac{2p}{\rho} \right)^{1/2} \right]$$


$$\boxed{\Delta t = 329 \text{ s or } 5.48 \text{ min}}$$

If there is no pressure in tank:  $P = 0$

$$\Delta t = \frac{A}{A_e} \sqrt{\frac{2h_0}{g}} = 639 \text{ s}$$

$$\boxed{\Delta t = 10.65 \text{ min}}$$

4. **Approach1:** Set the control volume:

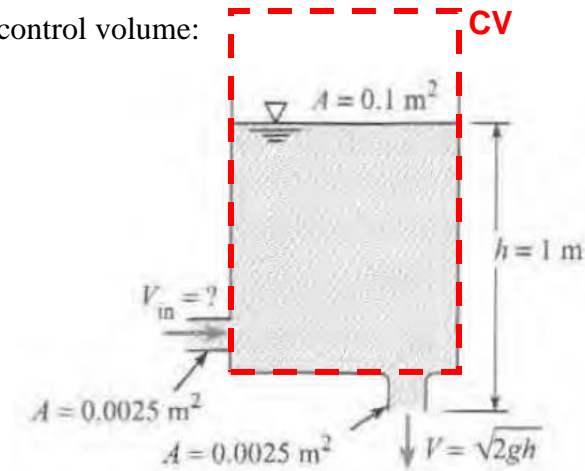

Continuity equation:

$$0 = \frac{d}{dt} m_{cv} + \sum \dot{m}_o - \sum \dot{m}_i$$

**Term by Term analysis**

Term1: is mass inside the CV change through the time? YES!

$$m_{cv} = \rho V$$

$$m_{cv} = \rho(hA_{tank})$$

$$\frac{d}{dt} m_{cv} = \frac{d}{dt} (\rho h A_{tank})$$

$$\frac{d}{dt} m_{cv} = \rho A_{tank} \frac{dh}{dt}$$

Term2: There is one outlet.

$$\dot{m}_o = \rho Q$$

$$\dot{m}_o = \rho V A_{exit}$$

$$\dot{m}_o = \rho A_{exit} \sqrt{2gh}$$

Term3: There is one inlet.

$$\dot{m}_i = \rho Q$$

$$\dot{m}_i = \rho V_{in} A_{inlet}$$

Rewrite the continuity equation:

$$\rho A_{tank} \frac{dh}{dt} + \rho A_{exit} \sqrt{2gh} - \rho V_{in} A_{inlet} = 0$$

$$\frac{dh}{dt} = 0.001 \frac{m}{s} \text{ Positive since rising!}$$

$$h = 1 \text{ m}$$


$$-V_{in}A_{in} + V_{out}A_{out} = -A_{tank}(dh/dt)$$

$$-V_{in}(.0025) + \sqrt{2g(1)}(.0025) = -0.1(0.1) \times 10^{-2}$$

$$V_{in} = \frac{\sqrt{19.62}(.0025) + 10^{-4}}{0.0025}$$

$$V_{in} = 4.47 \text{ m/s}$$

**Approach2:** Set the control volume:

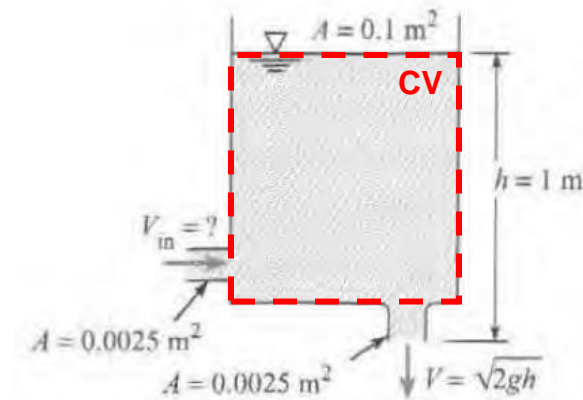

Continuity equation:

$$0 = \frac{d}{dt}m_{cv} + \sum \dot{m}_o - \sum \dot{m}_i$$

**Term by Term analysis**

Term1: is mass inside the CV change through the time? NO! since water level rising in the tank.

$$\frac{d}{dt}m_{cv} = 0$$

Term2: There are **two outlets**.

**bottom outlet:**

$$\dot{m}_o = \rho Q$$

$$\dot{m}_o = \rho V A_{exit}$$

$$\dot{m}_o = \rho A_{exit} \sqrt{2gh}$$

**top outlet:**

$$\dot{m}_o = \rho Q_{rise}$$

$$\dot{m}_o = \rho V_{rise} A_{tank}$$

$$V_{rise} = \frac{dh}{dt}$$

$$\dot{m}_o = \rho A_{tank} \frac{dh}{dt}$$

Term3: There is one inlet.

$$\dot{m}_i = \rho Q$$

$$\dot{m}_i = \rho V_{in} A_{inlet}$$

Rewrite the continuity equation:

$$\rho A_{tank} \frac{dh}{dt} + \rho A_{exit} \sqrt{2gh} - \rho V_{in} A_{inlet} = 0$$

$$\frac{dh}{dt} = 0.001 \frac{m}{s} \text{ Positive since rising!}$$

$$h = 1 \text{ m}$$

$$\boxed{V_{in} = 4.47 \text{ m/s}}$$