


SOLUTION- A2Problem 1 (5 marks)

The cantilever beam shown below is subjected to the loads shown in the figure. Use the **moment-area method** to determine the **displacement @B** and the **slope @A**.

	<p>Note: $E = 200 \text{ GPa}$, $I = 50(10^6) \text{ mm}^4$</p> <p>Note: Give your answers in "mm"</p> <p>Note: C = fixed support</p>
---	--

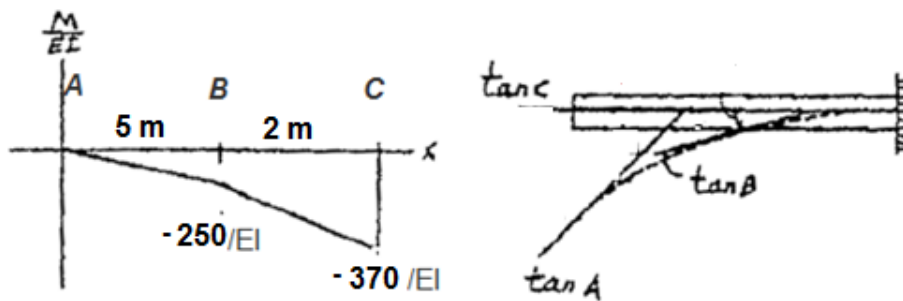

the displacement at point B.

$$\Delta_B = t_{B/C} = (-250/EI * 2)(2/2) + (0.5 * -120/EI * 2)(2 * 2/3)$$

$$= 660/EI \downarrow \quad \dots \quad 660 / [(200 \times 10^6) * (50 \times 10^{-6})] = 0.066 \text{ m} = 66 \text{ mm} \downarrow$$


the slope at point A.



$$\Theta_A = \Theta_{A/C} = (-250/EI * 5 * 0.5) + (-250/EI * 2) + (0.5 * -120/EI * 2)$$

$$= 1245/EI \quad \dots \quad 1870 / [(200 \times 10^6) * (50 \times 10^{-6})] = 0.1245 \text{ radians ccw}$$

Problem 2 (5 marks)

The beam shown below is subjected to the load shown in the figure. Use the **conjugate-beam method** to determine the displacement at point C.

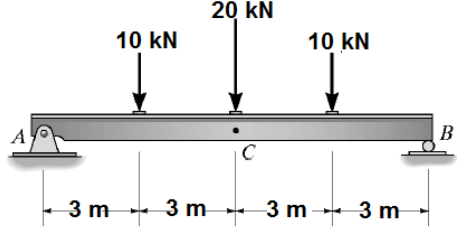	<p>Note: Give your answers in terms of "EI" (constant for the entire beam).</p> <p>Note: A = pin , B = roller support</p>
---	---

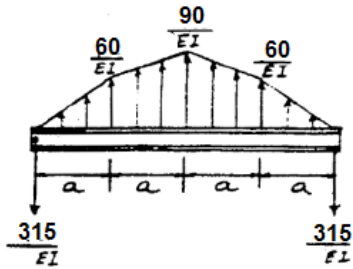


$$\theta_B = V_B' = \frac{315}{EI} \quad \text{Ans}$$

$$\left(+\sum M_C = 0; -\frac{45}{EI} \left(\frac{3}{3} \right) - \frac{180}{EI} \left(\frac{3}{2} \right) - \frac{90}{EI} (4) + \frac{315}{EI} (6) + M_C = 0 \right.$$



$$\Delta_C = M_C = -\frac{1215}{EI} \quad \text{Ans}$$

(displacement is downwards)



Problem 3 (5 marks)

The beam shown below is subjected to the loads shown in the figure. Use the **moment-area method** to determine the displacement at point C.

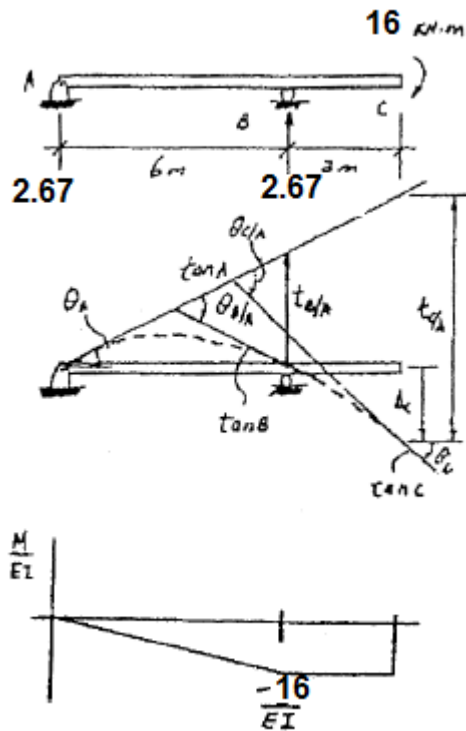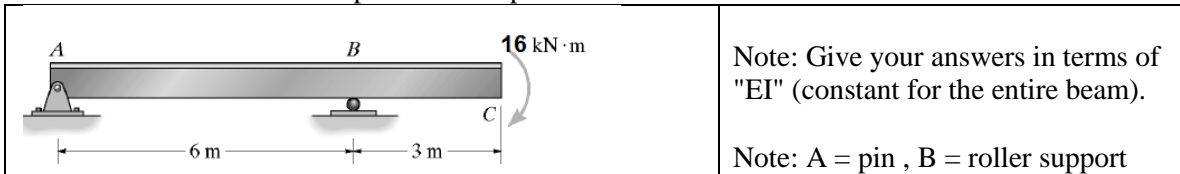


$$I_{B/A} = \frac{1}{2} \left(\frac{-16}{EI} \right) (6)(2) = \frac{-96}{EI}$$

$$I_{C/A} = \frac{1}{2} \left(\frac{-16}{EI} \right) (6)(3+2) + \left(\frac{-16}{EI} \right) (3)(1.5) = \frac{-312}{EI}$$

$$\Delta_C = |I_{C/A}| - \frac{9}{6} |I_{B/A}| = \frac{312}{EI} - \frac{9(96)}{6(EI)} = \frac{168}{EI} \downarrow \text{Ans}$$

Problem 4 (5 marks)

The beam shown below is subjected to the load shown in the figure. Use the **conjugate-beam method** to determine the displacement at point D.

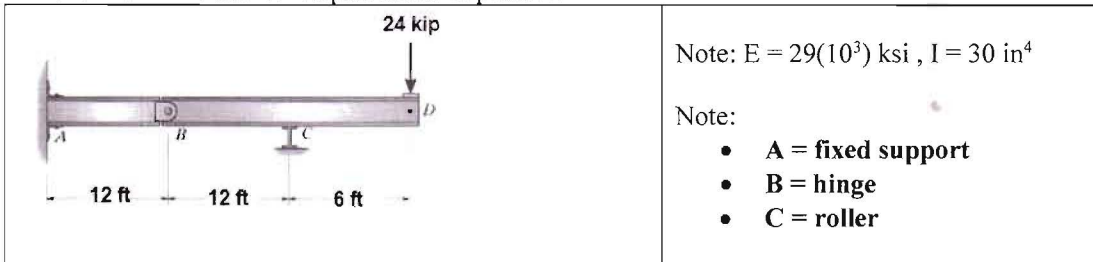

For part ABC :

$$\sum M_B = 0$$

$$-V'_c(12) - \left[\frac{1}{2} \left(\frac{144}{EI} \right) (12)(8) \right] \times 2 = 0$$

$$\Rightarrow V'_c = - \frac{1152}{EI}$$

$$\therefore \theta_c = V'_c \Rightarrow \theta_c = \frac{1152}{EI} \text{ clockwise}$$

For part CD :

$$\sum M_D = 0$$

$$M'_D + \left(\frac{1152}{EI} \right) (6) + \frac{1}{2} \left(\frac{144}{EI} \right) (6)(4) = 0$$

$$\Rightarrow M'_D = - \frac{8640}{EI}$$

$$\therefore \Delta_D = M'_D$$

$$\Rightarrow \Delta_D = \frac{8640}{EI} \downarrow$$

